


# V6JN4 - 6" DEEP 25 DEGREE NARROW J BLADE 4" SPACING EXTRUDED ALUMINUM LOUVERED EQUIPMENT SCREEN

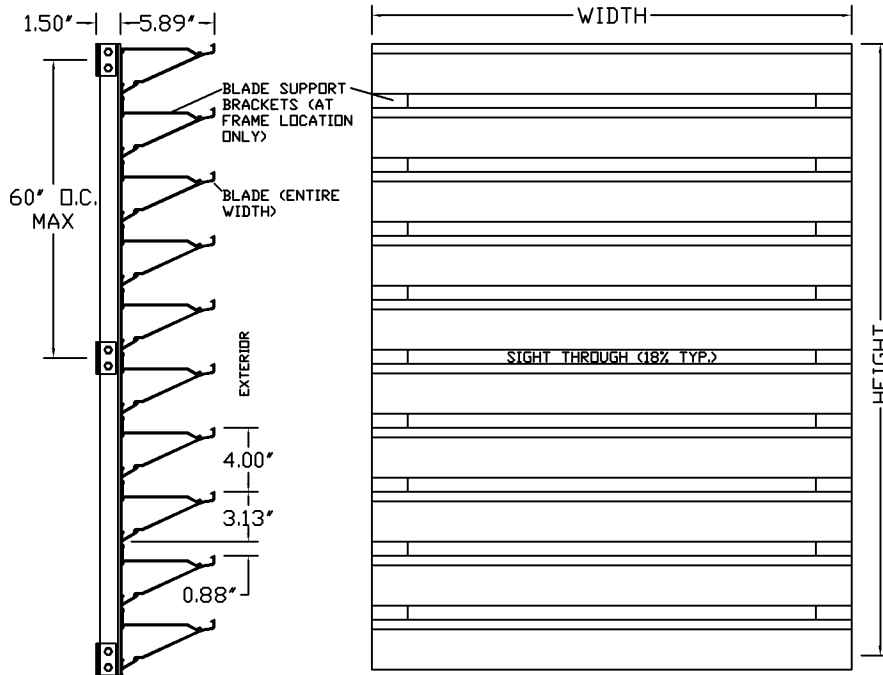

BLADE - 0.081" THICKNESS TYPE 6063-T5 EXTRUDED ALUMINUM  
 FRAME - CONCEALED 0.125" THICKNESS TYPE 6063-T5 EXTRUDED ALUMINUM

DESIGNED FOR 100 MPH WIND LOAD  
 SIZES 12" WIDE X 12" HIGH UP TO UNLIMITED SIZE AVAILABLE

OPTIONS:  
 HIGHER WIND LOAD RATINGS  
 ARCHITECTURAL FINISHES

NOTE:  
 STRUCTURAL FRAMING TO SUPPORTING STRUCTURE (ROOF DECK, WALLS, CONCRETE PAD, ETC.) BY OTHERS. STRUCTURAL FRAMING IS REQUIRED EVERY 60" OF WIDTH OR HEIGHT TO MEET 100 MPH WIND LOAD.

SECTION VIEW

ELEVATION VIEW

<p><b>END PANEL</b></p> <p>EXTERIOR</p> <p>BLADE SUPPORT BRACKETS</p> <p>1.25'</p> <p>CONCEALED ANGLE FRAME</p>	<p><b>STIFFENER</b></p> <p>EXTERIOR</p> <p>BLADE SUPPORT BRACKETS</p> <p>1.25'</p> <p>STIFFENER (EVERY 60" WIDTH MAX)</p> <p>BLADE STIFFENER</p>	<p><b>VERTICAL MULLION (MULTIPLE PANELS WIDE)</b></p> <p>EXTERIOR</p> <p>BLADE SUPPORT BRACKETS</p> <p>1.25'</p> <p>STIFFENERS (JOINED BY INSTALLER)</p> <p>HIDDEN</p>	<p><b>MITERED OUTSIDE CORNER</b></p> <p>EXTERIOR</p> <p>BLADE SUPPORT BRACKETS</p> <p>12' TYP.</p> <p>CORNERS MITERED AND WELDED</p> <p>STIFFENERS (JOINED BY INSTALLER)</p>
<p><b>TYPICAL MOUNTING</b></p> <p>REAR EDGE OF LOUVER</p> <p>BLADE SUPPORT BRACKETS</p> <p>3/8" BOLT (PROVIDED)</p> <p>LOUVER FRAMING (ENTIRE HEIGHT)</p> <p>1.50'</p> <p>FASTENER TO STRUCTURAL (BY INSTALLER)</p> <p>1-1/4" X 1-1/4" X 2" LONG CLIP ANGLE (PROVIDED)</p> <p>STRUCTURAL FRAMING (BY OTHERS)</p>		<p><b>HORIZONTAL MULLION (MULTIPLE PANELS HIGH)</b></p> <p>STIFFENERS (JOINED BY INSTALLER)</p> <p>EXTERIOR</p> <p>HIDDEN</p>	
<p><b>ARCHITECTURAL LOUVERS</b></p> <p>266 West Mitchell Ave - Cincinnati, OH 45232              PH: (888) 568-8371 Fax: (888) 568-8370</p> <p>PROJECT _____</p> <p>CONTRACTOR _____</p> <p>ARCHITECT _____</p> <p>DRAWN BY: JRR DATE: 08/2007 DRAWING TYPE: TECHNICAL SHEET DRAWING TITLE: V6JN4</p>			